


# CAT 7

## 2XS/FTP 4 PR AWG 23/1

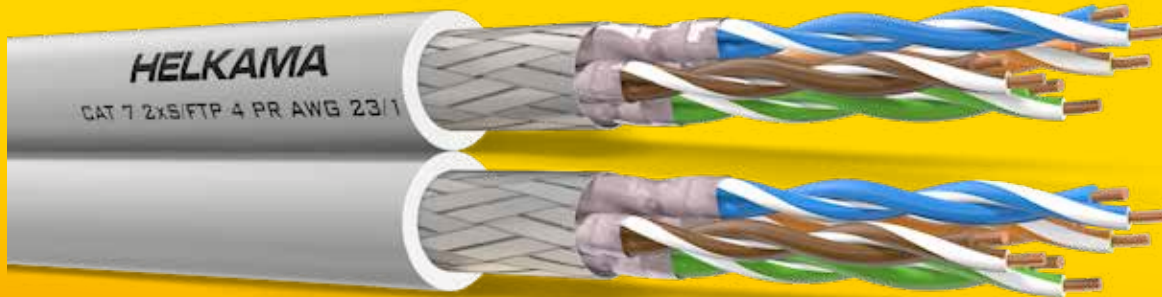

<b>CONDUCTOR</b>	Solid copper conductor 23 AWG/1
<b>INSULATION</b>	Foam PE
<b>PAIR SHIELDING</b>	Aluminium foil
<b>SHIELDING</b>	Tinned copper wire braid
<b>SHEATH</b>	LSZH
<b>REFERENCE STANDARD</b>	IEC 61156-5 & ISO/IEC 11801

### PHYSICAL PROPERTIES:

<b>BENDING RADIUS (Installation)</b>	8 x Ø
<b>MAX. RECOMMENDED PULLING TENSION</b>	80 N
<b>NOMINAL OUTER Ø</b>	7.1 ± 0.3 mm X 14.3 ± 1 mm
<b>CABLE WEIGHT</b>	132 kg/km
<b>CORE IDENTIFICATION Pair colours</b>	1. White/Blue stripe & Blue 2. White/Orange stripe & Orange 3. White/Green stripe & Green 4. White/Brown stripe & Brown
<b>PACKAGING</b>	500 m drum, 1000 m drum

### MAIN CHARACTERISTICS:

<b>FIRE PERFORMANCE</b>	Dca-s1a, d2, a1 IEC 60332-1-2 IEC 60332-3-22
<b>UV RESISTANCE (Black or grey cables only)</b>	UL1581 section 1200
<b>MAX. CONDUCTOR DC RESISTANCE</b>	95 Ω/km @20 °C
<b>CONDUCTOR LOOP RESISTANCE</b>	max. 19 Ω/100 m @20 °C
<b>NOM. MUTUAL CAPACITANCE</b>	≤ 5.6 nF/100 m @1 kHz
<b>CAPACITANCE UNBALANCE PAIR TO GROUND</b>	≤ 1600 pF/km @1 kHz
<b>MIN. INSULATION RESISTANCE</b>	5000 MΩ/m
<b>IMPEDANCE</b>	100 ± 25 Ω @100 MHz
<b>RATED TEMPERATURE</b>	75 °C
<b>OPERATING TEMPERATURE RANGE</b>	-20 °C - 75 °C

Subject to change without prior notice. See latest update on our webpage.

© 2024 Helkama Bica Oy. All rights reserved.

**HELKAMA**  
THE PERFECT CONNECTION

helkamabica.com  
customer.care@helkamabica.fi  
+358 2 410 8700



helmacab.nl  
info@helmacab.nl  
+ 31 183 617 109

## ITEM NUMBERS:

Part number	Cable type	Colour	Standard length m
3340124082	CAT 7 2xS/FTP AWG 23/1	Black	500
3340224082	CAT 7 2xS/FTP AWG 23/1	Yellow	500
3340324082	CAT 7 2xS/FTP AWG 23/1	Grey	500
3340424082	CAT 7 2xS/FTP AWG 23/1	White	500
3340524082	CAT 7 2xS/FTP AWG 23/1	Orange	500
3340624082	CAT 7 2xS/FTP AWG 23/1	Blue	500
3340724082	CAT 7 2xS/FTP AWG 23/1	Red	500
3340824082	CAT 7 2xS/FTP AWG 23/1	Green	500

## PERFORMANCE:

F (MHz)	ATT (dB/100 m)	RL (dB)	NEXT (dB)	PS NEXT (dB)	ACRF (EL FEXT) (dB/100 m)	PS ACRF (PS EL FEXT) (dB/100 m)	PD (ns/100 m)
4.0	3.6	30	98	95	96	92	449
8.0	5.0	32	98	95	94	89	444
10.0	5.6	35	98	95	91	90	442
16.0	7.2	35	98	95	81	76	440
20.0	8.1	38	99	96	81	77	439
25.0	9.1	39	98	95	84	76	438
31.2	10.0	39	97	94	83	77	437
62.5	14.5	34	95	92	79	76	436
100.0	17.7	32	92	89	82	73	435
200.0	26.1	30	88	85	69	66	434
250.0	27.9	28	86	83	74	65	434
300.0	31.9	27	86	83	69	64	433
400.0	37.8	28	83	80	59	56	433
500.0	40.7	23	81	78	56	51	433
600.0	45.8	25	80	77	58	52	433

**F** = Frequency

**ATT** = Attenuation

**RL** = Return Loss

**NEXT** = Near End Crosstalk

**PS NEXT** = Power Sum Near End Crosstalk

**ACRF (EL FEXT)** = Attenuation to Crosstalk Ratio Far End Crosstalk

**PS ACRF (PS EL FEXT)** = Power Sum Attenuation to Crosstalk Ratio Far End Crosstalk

**PD** = Phase Delay